

Airflo and Whisperair blowers



Whisper quiet performance



Enjoy the soothing effects of powerful, invigorating bubbles in your spa without excess equipment noise.

- Whisper quiet operation
- Hi-flow air movement
- Compact design
- Variable mounts



Compact Design

The compact design of the Waterco spa blower enables installation in smaller areas and tight corners. The convenient position of the mounting base and air inlet/outlets reduces installation time and cost.

Thermal Cutout

Waterco spa blowers feature an important safety feature, an integral thermal cutout. This cutout stops the electric motor if it becomes excessively warm. This cutout does not require manual resetting and will automatically restart the motor when it is sufficiently cooled.

Standard Model – Airflo, Whisperair, Whisperair S

The standard model of the Blower draws air into the unit through the Bottom Cowl of the Blower.


The Airflo version has Air Inlet holes throughout the Bottom Cowl, while the Whisperair models draw all the required air in through gaps around the perimeter of the Bottom Cowl.



Inline Model – Whisperair Elite, Whisperair S Elite

The Inline version of the Blower differs from the Standard Model in that rather than having Air Inlet holes in the Bottom Cowl of the casing, it has an Inlet Port in the top of the Outer Housing. The piping connected to this port should then be extended to a safe and convenient position.

This makes the Inline Model quieter than the Standard Model when running.

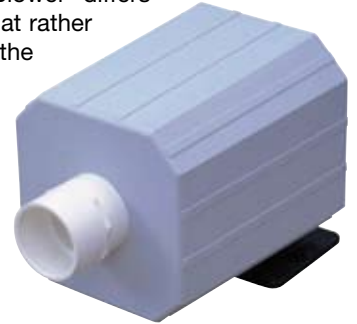

Airswitch Models (Whisperair S and Whisperair S Elite)

The Whisperair S and Whisperair S Elite come with an Airswitch Controller and connecting tubing to provide remote activation/deactivation of the Blower. The Button for the Airswitch Controller is designed to be installed in the shell of the Spa and is connected to the Blower via the tubing.



Variable mounts

All models of Waterco Blower have two identical 50 mm diameter Outlet Ports. One of the ports is in the Bottom Cowl of the Blower and the other is in the side of the Blower. The Stand can be attached to either of these ports and leaves the other free to connect to the Spa via the piping. It is also possible to connect the pipe to the Outlet Port in the Bottom Cowl of the Blower and seal off the other Outlet Port.



Technical Data

| Size | Power | Voltage | Weight | Suction | Flow |
|-----------------|----------|---------|--------|-----------|-----------|
| 225 x 280 x 360 | 900 watt | 240 AC | 3.7kg | 50mm hpvc | 50mm hpvc |

Please note: It is recommended that the Inline Models be mounted with the Air Inlet Port facing upwards. This will reduce the number of elbows required for the piping.

Warranty

Waterco blowers are covered by a comprehensive 12 month warranty.

OFFICES - AUSTRALIA

NSW - Sydney (Head Office)
Tel: +61 2 9898 8600
QLD - Brisbane
Tel: +61 7 3299 9900
VIC/TAS - Melbourne
Tel: +61 3 9764 1211
WA - Perth
Tel: +61 8 9273 1900
SA/NT - Adelaide
Tel: +61 8 8244 6000
ACT Distribution
Tel: +61 2 6280 6476

OFFICES - OVERSEAS

Waterco (Europe) Limited
Radfield, Kent, UK
Tel: +44 (0) 1795 521 733
Waterco (USA) Inc
Phoenix, Arizona, USA
Tel: +1 623 434 4703
Waterco USA
Augusta, USA
Tel: +1 706 793 7291
Waterco Canada
Quebec, Canada
Tel: +1 450 796 1421

Waterco (NZ) Limited
Auckland, New Zealand
Tel: +64 9 525 7570
Waterco (GZ) Limited
Guangzhou, China
Tel: +86 20 3222 2180
Waterco (Far East) Sdn Bhd
Selangor, Malaysia
Tel: +60 3 6145 6000
PT Waterco Indonesia
Jakarta, Indonesia
Tel: +62 21 4585 1481

DISTRIBUTED BY:

WATERCO
Water, the liquid of life

